


# 23.8" INDUSTRIAL MONITOR

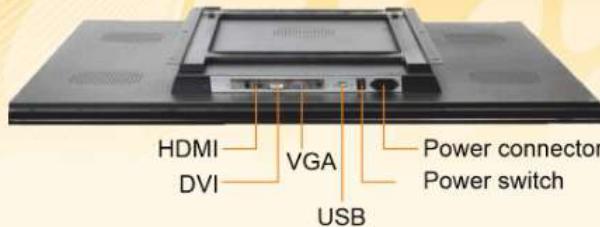

## FEATURES

- 23.8" TFT 250 Cd/m<sup>2</sup> nits high brightness LCD
- Capacitive touchscreen
- Open frame / Embedded Mounting
- HDMI, USB and VGA with multi-signal inputs


## APPLICATIONS

- ATM
- Kiosk
- Game Machine
- Industrial Automation
- Medical Equipments
- Vending Machine

# AUTO TAGGING SYSTEM

## FEATURES

- Useful equipment with safety to avoid operator interference to put flag during defect.
- Easy label change.
- Easy movement in traverse direction of web to settle on variable web width.
- Speed supported up to 400 mpm.
- Durable & efficient.

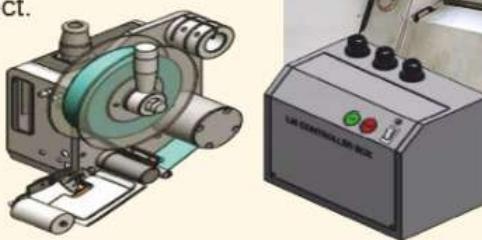

# LOWER EXPLOSIVE LIMIT (LEL) DETECTOR SYSTEM

## FEATURES

- Precise and stable measurement maintenance
- Faster response of less than one second
- Long maintenance intervals
- Extended temperature range of range of up to + 77 °C
- Conventional 4-to-20-mA analogue signal output
- Resistant towards shock and vibration up to 4 G
- Continuous self-testing in the context of the IEC/EN 61508 standard
- Ex approvals for worldwide application: ATEX, IECEx, UL, CSA

